ADVANCED RUBBER PRODUCTS

Specialty Silicone Polymer Cutout Switch Coupling Insulator To Improve Cutout Flashover Insulation Values

Imagination fused with high technologies



ISO 9001:2015

BUREAU VERITAS Certification

ARP™

Advanced Rubber Products


Div. of TMP Technologies Inc.

6110 Lamb Road • Wyoming, NY 14591
Phone: 585.495.6231 • Fax: 585.495.6526
www.arp-hivoltageinsulators.com
email: info@arp-hivoltageinsulators.com

CATALOG No. ARP-CS-EXT

ARP™
Advanced Rubber Products
Div. of TMP Technologies Inc.

6110 Lamb Road
Wyoming, NY 14591
Phone: 585.495.6231
Fax: 585.495.6526
www.arp-hivoltageinsulators.com
email: info@arp-hivoltageinsulators.com

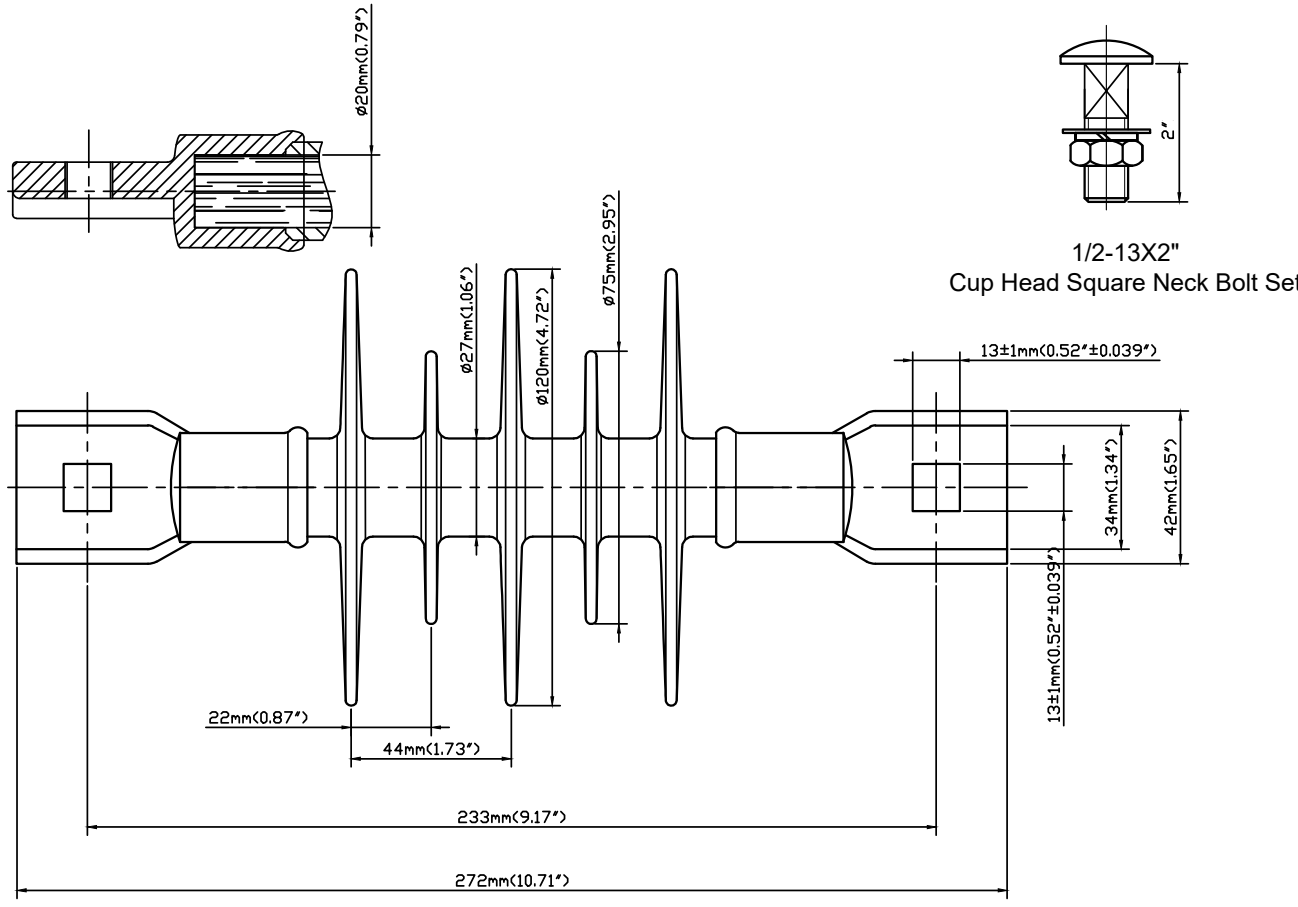

1/2-13X2"
Cup Head Square Neck Bolt Set

NOTE.

1. END FITTINGS ARE MADE FROM CARBON STEEL FORGED AND GALVANIZED.
2. FIBERGLASS ROD IS MADE FROM EPOXY RESIN(ECR).
3. THE DIA. OF FRP ROD IS 20mm(0.79 inches) SOLID.
4. CREEPAGE DISTANCE : 400mm(16.54 inches)
5. FLASHOVER DISTANCE : 180mm(7.09 inches)
6. POWER FREQUENCY WITHSTAND VOLTAGE(DRY) : 42 kV
7. LIGHTING IMPULSE WITHSTAND VOLTAGE(1.2 x 50us) : 125kV(BIL)
8. TENSILE STRENGTH : 9.8 kN(1,000 kgf)
9. TORSIONAL LOAD : 40 lb.ft(54.23N.m)
10. THE TOLERANCE IS ±5% UNLESS OTHERWISE NOTED.

THESE DRAWINGS AND SPECIFICATIONS, AND THE DATA CONTAINED THEREIN, ARE THE EXCLUSIVE PROPERTY OF TMP TECHNOLOGIES INC. THESE DRAWINGS ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT, WITHOUT THE PRIOR WRITTEN PERMISSION OF TMP TECHNOLOGIES INC., BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT THE MANUFACTURE OF ARTICLES FOR TMP TECHNOLOGIES INC.

DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED	
X	±0.1
XX	±0.02
XXX	±0.010
ANGLES	±1°

Launch Printing Form 25168 - Rev. 5-19 (34630)

Designed by	Date	Part Number	Scale
J.H.PARK	07/27/15	ARP-CS-EXT	N/A

ARP™ ADVANCED RUBBER PRODUCTS DIV OF TMP TECHNOLOGIES INC

COUPLING INSULATOR FOR CUTOUT SWITCH

Filepath	Units	Sheet
	INCHES	1/1