	Catalog Number	Voltage class	'X' Section Length inch (mm)	Base Fitting Thread (in)	No. of Sheds	Leakage Distance inch (mm)	Dry Arc Distance inch (mm)	SCL Specified Cantilever Load lbs (kN)	Max Design Cantilever Load lbs (kN)	Tensile Strength lbs (kN)	PFFO Dry (kV)	PFFO Wet (kV)	CIFO Pos (kV)	CIFO Neg (kV)	RIV test (kV)	RIV Max (µV)
Horizontal	ARP-LPH-15SK	15	10.0 (255)	3/4-10 +.015"	4	12.7 (322)	7.7 (196)	2800 (12.5)	1400 (6.25)	5,000 (22)	86	66	146	193	10	100
	ARP-LPH-25SK	25	14.5 (369)	3/4-10 +.015"	5	20.3 (516)	12.3 (312)	2800 (12.5)	1400 (6.25)	5,000 (22)	122	103	208	271	15	100
	ARP-LPH-35SK	35	16.8 (427)	3/4-10 +.015"	7	24.1 (613)	14.6 (370)	2800 (12.5)	1400 (6.25)	5,000 (22)	141	122	239	309	22	100
	ARP-LPH-35SK-HP	35	18.1 (460)	7/8-9 +.015"	7	42.9 (1090)	12.0 (306)	2800 (12.5)	1400 (6.25)	5,000 (22)	135	107	196	218	22	100
	ARP-LPH-46SK	46	25.6 (651)	7/8-9 +.015"	7	47.0 (1195)	19.2 (487)	2800 (12.5)	1400 (6.25)	5,000 (22)	188	168	310	376	30	200
	ARP-LPH-69SK	69	28.1 (714)	7/8-9 +.015"	8	54.6 (1387)	21.6 (550)	2800 (12.5)	1400 (6.25)	5,000 (22)	230	200	380	470	44	200
	ARP-LPH-69SK-HP	69	28.1 (715)	7/8-9 +.015"	15	91.7 (2330)	22.0 (560)	2800 (12.5)	1400 (6.25)	5,000 (22)	230	200	380	470	44	200
	ARP-GBH-1	Gain base used for 15, 25, 35 kV posts. Includes 3/4" galvanized bolt to mount insulator														
	ARP-GBH-2	Gain base used for 35-HP, 46, 69 kV posts. Includes 7/8" galvanized bolt to mount insulator														
Vertical	ARP-LPV-15SK	15	10.2 (259)	3/4-10 +.015"	4	12.7 (322)	7.7 (196)	2800 (12.5)	1400 (6.25)	5,000 (22)	86	66	146	193	10	100
	ARP-LPV-25SK	25	14.7 (373)	3/4-10 +.015"	6	20.3 (516)	12.3 (312)	2800 (12.5)	1400 (6.25)	5,000 (22)	122	103	208	271	15	100
	ARP-LPV-35SK	35	17.0 (432)	3/4-10 +.015"	7	24.1 (613)	14.6 (370)	2800 (12.5)	1400 (6.25)	5,000 (22)	141	122	239	309	22	100
	ARP-LPV-46SK	46	25.6 (650)	7/8-9 +.015"	7	47 (1195)	19.2 (487)	2800 (12.5)	1400 (6.25)	5,000 (22)	188	168	310	376	30	200
	ARP-LPV-69SK	69	28.1 (713)	7/8-9 +.015"	8	54.6 (1387)	21.7 (550)	2800 (12.5)	1400 (6.25)	5,000 (22)	230	200	380	470	44	200
	ARP-LPV-69SK-HP	69	28.1 (713)	7/8-9 +.015"	15	91.7 (2330)	22.1 (560)	2800 (12.5)	1400 (6.25)	5,000 (22)	230	200	380	470	44	200
	ARP-GBV-1	Gain base used for 15, 25, 35 kV posts. Includes 3/4" galvanized bolt to mount insulator														
	ARP-GBV-2	Gain base used for 46, 69 kV posts. Includes 7/8" galvanized bolt to mount insulator														


LINE POSTS

example: ARP-LPH-15SKGB-1

Brand		Insulator type	End Fittings		Voltage	Material & Mfg location	Options
ARP	-	**LP**	**H**	-	**15**	**SK**	**GB-1**
ARP= Advanced Rubber Products		LP= Line post	H= Horizontal		15= 15kV	SK= Silicone	Blank= No options
			V= Vertical		25= 25kV		GB= Gain base (hor or vert)
			CN= 'C' neck		35= 35kV		HP= High leak
			FN- 'F' neck		46= 46kV		SP= Special design
			SC= Integral clamp		69= 69kV		1= Includes cable clamp
							34= ¾" +.015" tapped hole
							GB-1= Gain base and cable clamp

NOTE:
1. End Fittings are made from Galvanized Forged Steel.
2. Fiberglass solid core rod is made using Epoxy Resin.
3. Clamp and Stud Base dimensions are in accordance with ANSI C29.7.
4. 15, 25, & 35KV Insulators - 3/4-10 UNC Galvanized Bolt supplied with Gain Base.
5. 46 & 69KV Insulators - 7/8-10 UNC Galvanized Bolt supplied with Gain Base.

Launch Printing Form 14325 - Rev. 04-23 (44036)

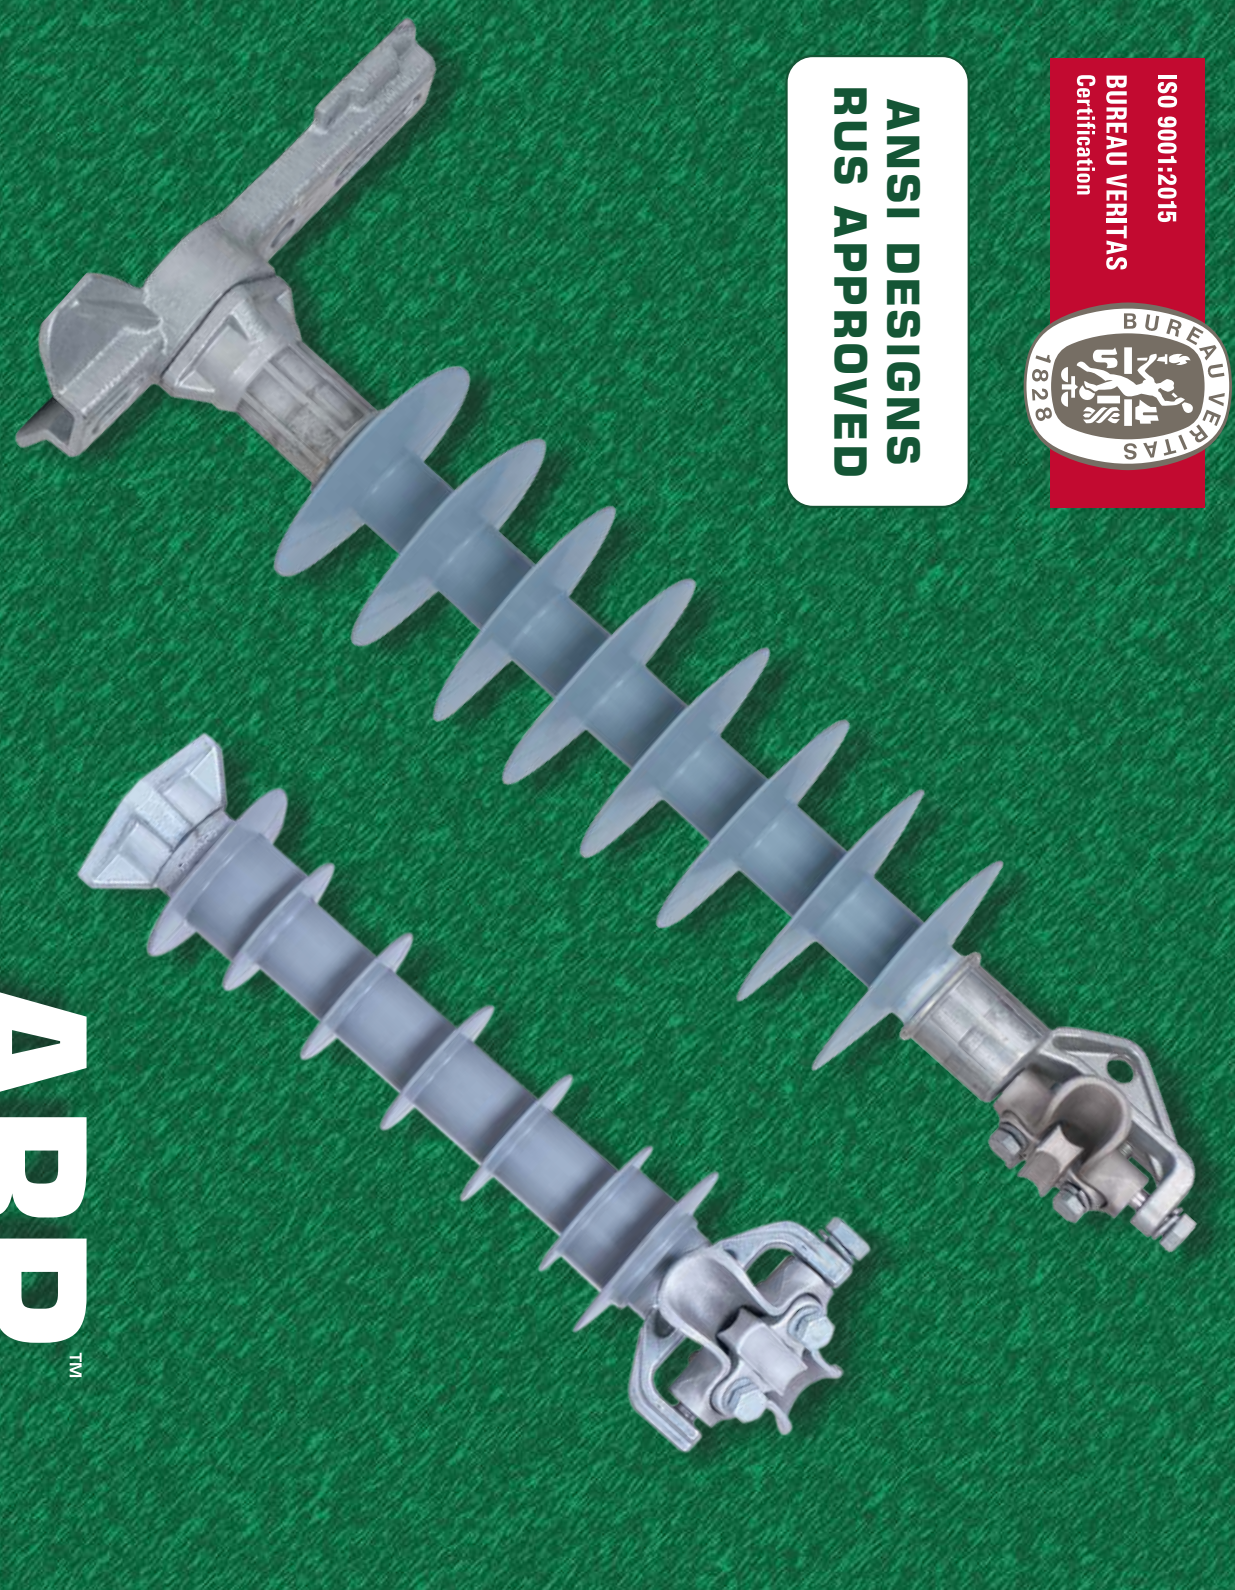

ADVANCED RUBBER PRODUCTS

Silicone Polymer Horizontal & Vertical Line Post Insulators

15KV, 25KV, 35KV, 46KV, & 69KV

Imagination fused with high technologies


ISO 9001:2015
BUREAU VERITAS
Certification

ANSI DESIGNS
RUS APPROVED


ARP™
Advanced Rubber Products
Div. of TMP Technologies Inc.

6110 Lamb Road • Wyoming, NY 14591
Phone: 585.495.6231 • Fax: 585.495.6526
www.arp-hivoltageinsulators.com
email: techsales@advancedrubberproducts.com


Silicone Polymer Horizontal Line Post Insulators




ARP-LPH-15SKGB

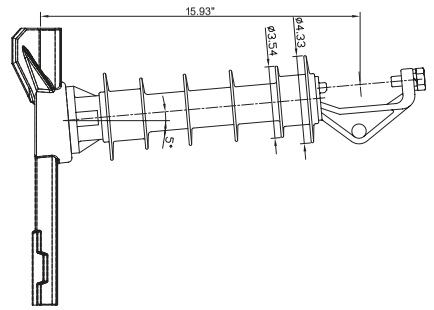


ARP-LPH-25SKGB

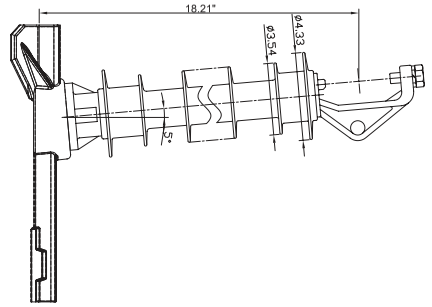


ARP-LPH-35SKGB

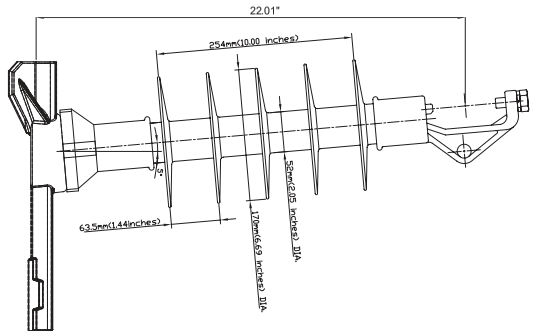


ARP-LPH-35SKHPGB

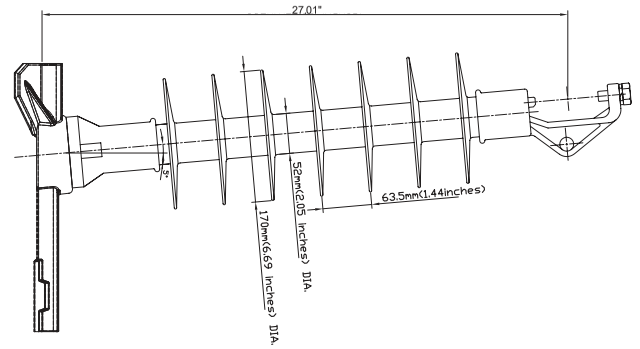


ARP-LPH-46SKGB

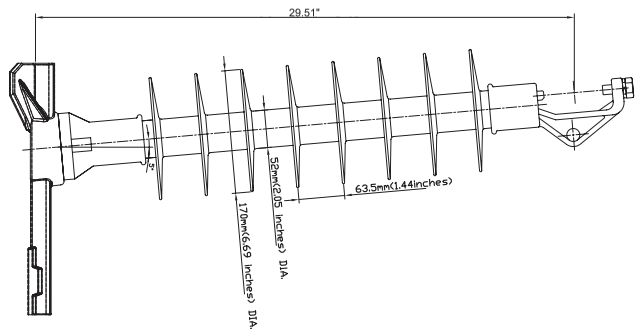

ARP-LPH-69SKGB

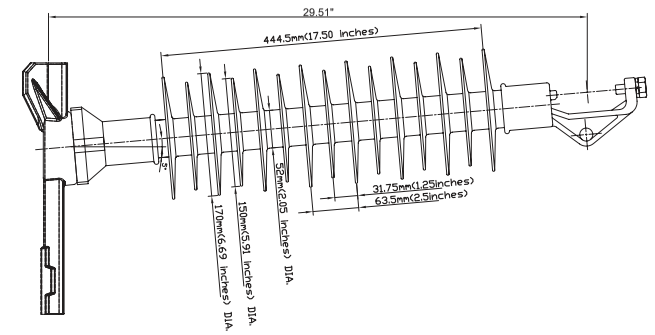

ARP-LPH-69SKHPGB




GAIN BASE ARP-GBH




ARP-GBH-1 = 3/4” Bolt
ARP-GBH-2 = 7/8” Bolt

ARP Horizontal Gain Base is inter-change-able with most other industry bases and can be mounted to existing 6” center to center pole mounting holes.


Silicone Polymer Vertical Line Post Insulators

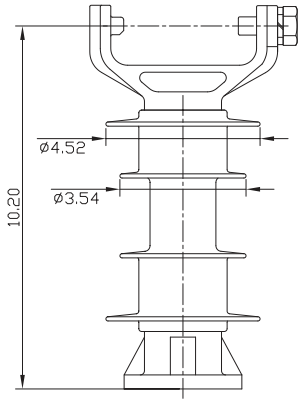


ARP-LPV-15SK

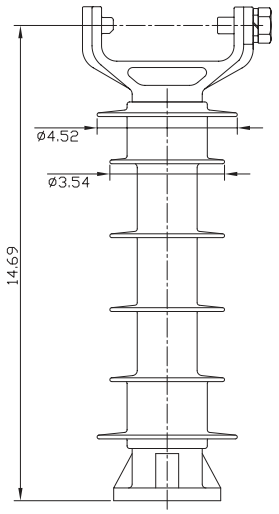


ARP-LPV-25SK

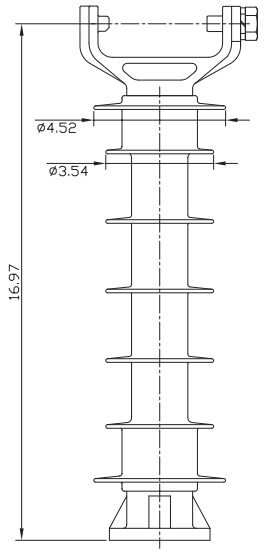


ARP-LPV-35SK

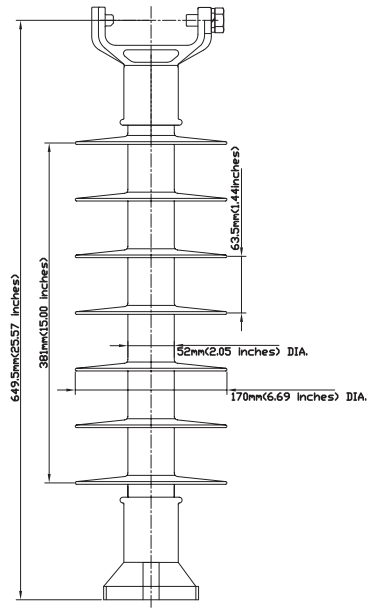

ARP-LPV-46SK

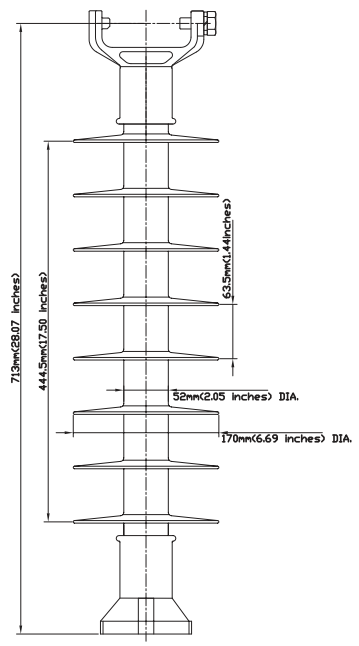

ARP-LPV-69SK

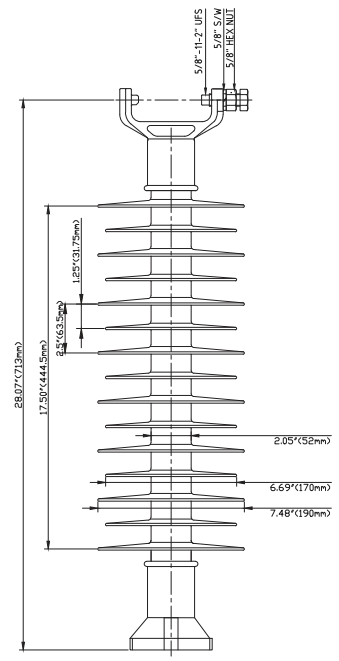


ARP-LPV-69SK-HP


CABLE CLAMP



PART NUMBER	CONDUCTOR RANGE	
	MIN	MAX
ARP-ATC-150	.375”	1.06”

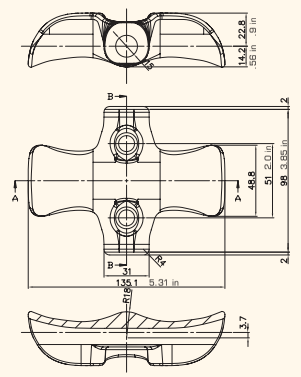

GAIN BASE ARP-GBV

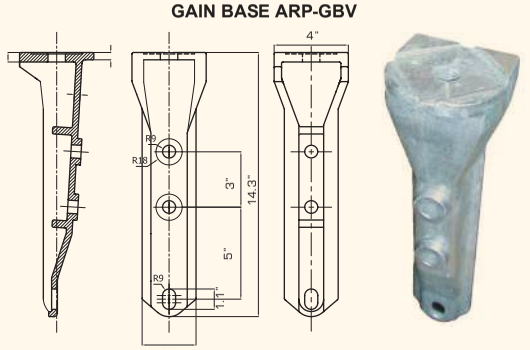

ARP-GBV-1 = 3/4” Bolt ARP-GBV-2 = 7/8” Bolt