ADVANCED RUBBER PRODUCTS

27kV Specialty Silicone Polymer Insulator to Replace Two 10" (254mm) Porcelain Disk Assemblies For Use in Horizontal Dead End Applications Only

Imagination fused with high technologies



ISO 9001:2015

BUREAU VERITAS Certification


RUS ACCEPTED

ARP™

Advanced Rubber Products

Div. of TMP Technologies Inc.


6110 Lamb Road • Wyoming, NY 14591
Phone: 585.495.6231 • Fax: 585.495.6526
www.arp-hivoltageinsulators.com
email: info@arp-hivoltageinsulators.com

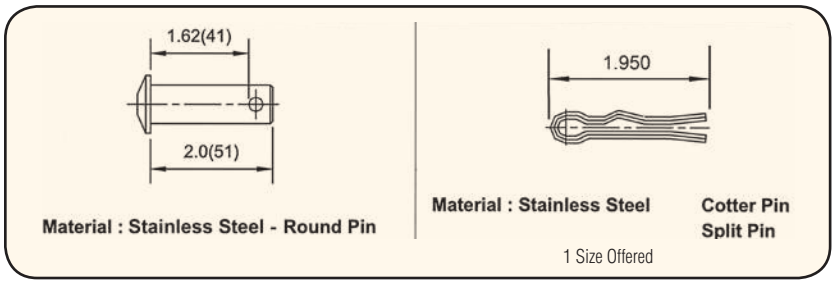

ARP™ Advanced Rubber Products
Div. of TMP Technologies Inc.

6110 Lamb Road
Wyoming, NY 14591
Phone: 585.495.6231
Fax: 585.495.6526
www.arp-hivoltageinsulators.com
email: info@arp-hivoltageinsulators.com

For Use in Horizontal Dead End Applications Only

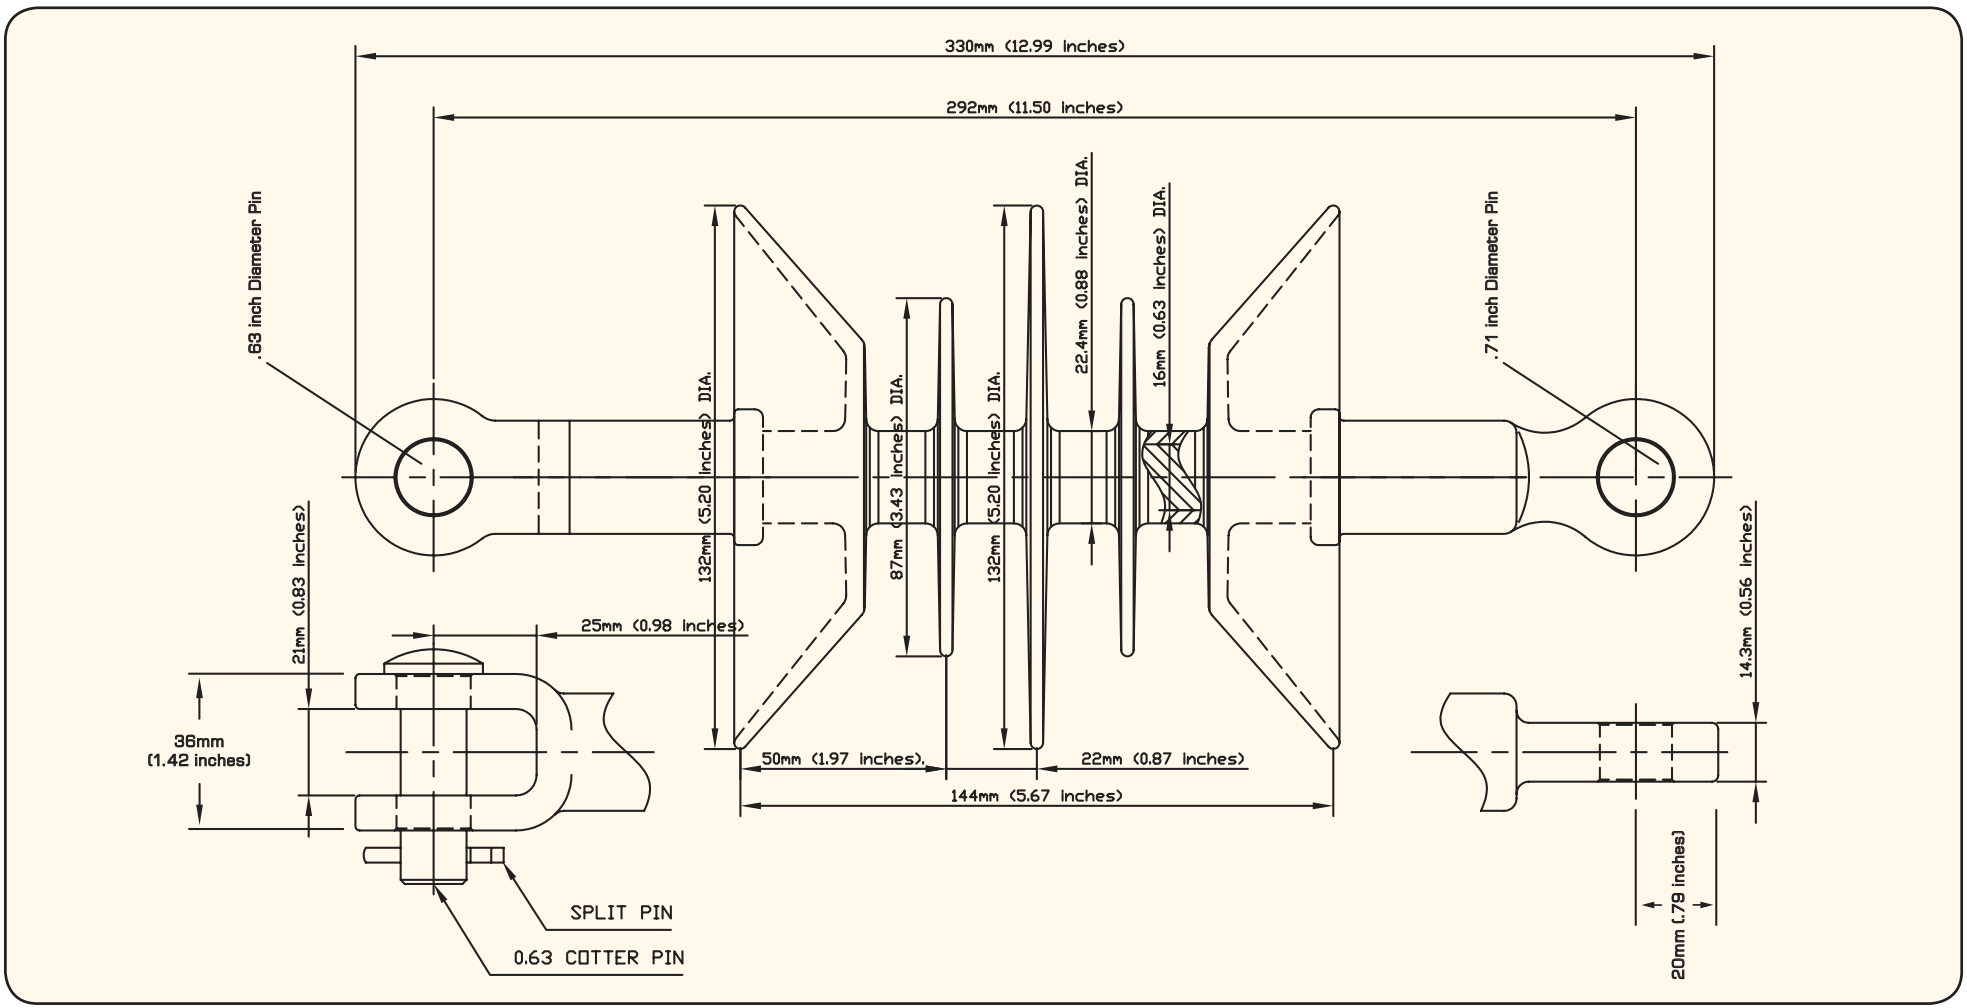

Catalog Number	ANSI Class	"X" Section Length Inches (mm)	"D" Shed Diameter Inches (mm)		No. of Sheds	Leakage Distance Inches (mm)	Dry Arc Distance Inches (mm)	SML Specified Mechanical Load lbs (kN)	RTL Routine Test Load lbs (kN)	Torsion ft-lb (N-m)	Flashover ANSI		Impulse Flashover ANSI		RIV		Power Arc kA-cycles	Net Wt. Pound	Parts per Box	Parts per Skid	Weight per Box lbs.	Weight per Skid lbs.
			Major	Minor							Dry (kV)	Wet (kV)	Pos (kV)	Neg (kV)	Test (kV)	Max (uV)						
ARP-27SKCE-SSI	DS-28	11.5 (292)	5.2 (132)	3.43 (87)	5	23.74 (603)	9.65 (245)	15000 (70)	7500 (35)	40 (55)	116	92	189	196	20	1	150	2.8	15	300	44	900

Notes: 1. End Fittings are made from Galvanized Forged Steel Castings. 2. Cotter Pins and Round Pins are made from Stainless Steel.

Launch Printing Form 13803 - Rev. 5-19 (34630)